

**Citation for published version:**

Suliman Shanbr, Faris Elasha, Mohamed Elforjani, and Joao Teixeira, 'Detection of natural crack in wind turbine gearbox', *Renewable Energy*, vol. 118: 172-179, October 2017.

**DOI:**

<https://doi.org/10.1016/j.renene.2017.10.104>

**Document Version:**

This is the Accepted Manuscript version.

The version in the University of Hertfordshire Research Archive may differ from the final published version.

**Copyright and Reuse:**

© 2017 Elsevier Ltd.

This manuscript version is distributed under the terms of the Creative Commons Attribution-NonCommercial-NoDerivatives License ( <http://creativecommons.org/licenses/by-nc-nd/4.0/> ), which permits non-commercial re-use, distribution, and reproduction in any medium, provided the original work is properly cited, and is not altered, transformed, or built upon in any way.

**Enquiries**

If you believe this document infringes copyright, please contact the Research & Scholarly Communications Team at [rsc@herts.ac.uk](mailto:rsc@herts.ac.uk)

**Detection of Natural Crack in Wind Turbine Gearbox**

S. S. Shanbr<sup>1</sup>, F. Elasha<sup>2</sup>, M. Elforjani<sup>3</sup>, J. Teixeira<sup>1</sup>,

<sup>1</sup> Cranfield University, Bedfordshire, UK, <sup>2</sup> Coventry University, UK, <sup>3</sup> University of Hertfordshire, UK


**Abstract**

One of the most challenging scenarios in bearing diagnosis is the extraction of fault signatures from within other strong components which mask the vibration signal. Usually, the bearing vibration signals are dominated by those of other components such as gears and shafts. A good example of this scenario is the wind turbine gearbox which presents one of the most difficult bearing detection tasks. The non-stationary signal analysis is considered one of the main topics in the field of machinery fault diagnosis. In this paper, a set of signal processing techniques has been studied to investigate their feasibility for bearing fault detection in wind turbine gearbox. These techniques include statistical condition indicators, spectral kurtosis, and envelope analysis. The results of vibration analysis showed the possibility of bearing fault detection in wind turbine high-speed shafts using multiple signal processing techniques. However, among these signal processing techniques, spectral kurtosis followed by envelope analysis provides early fault detection compared to the other techniques employed. In addition, outer race bearing fault indicator provides clear indication of the crack severity and progress.

**Keywords:** Condition Monitoring, Vibration, Natural Cracks, Rotating Machinery, signal processing.

**1. Introduction**

Wind energy is one of the growing renewable energy industries. In recent years, hundreds of wind farms, frequently in unmanned and remote areas, have been built. As the size of wind power projects keeps increasing, the need for reducing the downtime and making the best use of availability is essential. Wind turbines are becoming more established as an economically viable alternative to fossil-fueled power generation. The potential of the wind turbine could meet the demand in two times over in many places around the world [21]. The continuous monitoring and fault diagnosis of wind turbine systems (generators, blades, and drive trains) can be the most effective way to reduce the operational and maintenance costs of these systems and increase their reliability. With good data acquisition and appropriate signal processing, faults can thus be detected while components are operational and appropriate actions can be planned in time to prevent damage or failure of components. Maintenance tasks can be planned and scheduled more efficiently, resulting in increased reliability, availability, maintainability and safety (RAMS) whilst downtime, maintenance and operational costs are reduced [29]. The gearbox steps up the speed from the input shaft (approx. 20 rpm.) to the high-speed shaft (approx. 1500 rpm.). The high-speed bearings, which support both radial and thrust loads, are highly susceptible to failure, being subjected to continue variable speed, load and misalignment, see Fig. 1. The high-speed shaft is supported by the high-speed stage bearings located on the front and back ends of the shaft. If there is any misalignment between the high-speed shaft and the connected generator, unexpected minor vibrations will occur and may cause damage to the bearings. Therefore, as the wind turbine gearbox is virtually inaccessible since it is situated atop a high tower, once a bearing roller has broken, it could lead to breaking of another component of the gearbox, with the consequential need to replace several parts inside the gearbox [20, 30].

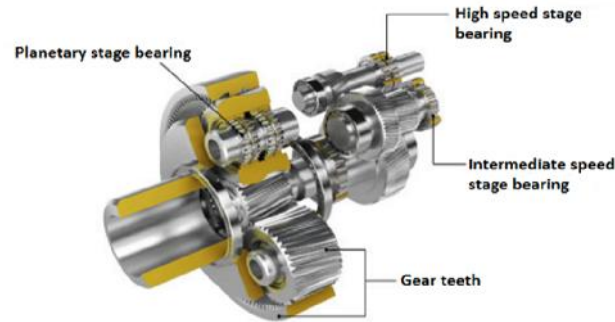

1

2

**Figure 1:** Wind turbine gearbox arrangement [olympus-ims.com]

3 Acquired vibration data followed by processing for fault diagnosis of rotating machinery with  
4 multiple bearings, such as wind turbine gearbox, can be a challenging task, as data are usually  
5 required in three perpendicular directions for a reliable diagnosis. Also, the extracted data are  
6 typically masked by another signals. Consequently the task of diagnosing faults on such  
7 systems may be daunting for even an experienced specialist [30]. Wind turbine condition  
8 monitoring and fault diagnosis were the central points of many types of research, which has  
9 been covered in the past literature [7, 9, 11, 13, 17, 18, 22, and 27]. Modern wind turbines are  
10 usually fitted out with some method of condition monitoring systems, including subsystem-  
11 level or system-level fault detection. Subsystem-level fault detection systems are typically  
12 based on monitoring parameters such as the vibration of the wind turbine drive train, bearing  
13 temperature, and oil particulate content [16]. A number of works have focused on fault  
14 diagnosis of rotating machinery by using vibration measurement techniques for bearings and  
15 gears of wind turbine gearboxes. In vibration measurement techniques, vibration signals are  
16 collected by means of vibration analyser equipped with sensor in time domain then this is  
17 converted into the frequency domain by using FFT analyser.

18

19 Several attempts have been made to improve advanced signal processing techniques for  
20 vibration signals to obtain useful information in recent years. Wavelet analysis, as one of the  
21 time- frequency analysis methods, has been developed to describe the change of frequencies in  
22 the signal over a period of time. A number of wavelet formulations have also been employed  
23 to remove non- stationary noise from the recorded vibration signals. Among them, continuous  
24 wavelet transform, discrete wavelet transform as well as harmonic wavelet transform have been  
25 accepted as key signal processing methods for wind turbine gearbox monitoring [3, 18, 26, and  
26 31]. Igba et al. [14], studied novel techniques for wind turbine faults detection using the RMS  
27 and peak values of vibration signals. They proposed techniques based on three models (signal  
28 correlation, extreme vibration, and RMS intensity), and validated the proposed techniques with  
29 time domain data driven approach using condition monitoring data from wind turbine. Their  
30 results showed that signal correlation with RMS values are good for detecting progressive  
31 failure such as bearing pitting in its incipient stage [14]. Ruiz Carcel and others proposed a  
32 technique based on merging process and vibration data with the objective of improving the  
33 detection of mechanical faults in industrial systems working under variable operating  
34 condition. They tested the capability of Canonical Variate Analysis (CVA) for detecting faults  
35 using experimental data acquired from a test rig where different process faults were introduced.  
36 The results showed that the combination of process and vibration data can effectively improve  
37 the detectability of mechanical faults in systems working under variable operating conditions  
38 [23]. Elasha and others presented a comparative study of adaptive filters in detecting a naturally

1 degraded bearing within a gearbox. They compared the effectiveness of four different  
2 techniques in diagnosing a bearing defects within a gearbox employed for endurance tests of  
3 an aircraft control system. The techniques investigated include the least mean square (LMS),  
4 self-adaptive noise cancellation (SANC) and the fast block LMS (FBLMS). All three  
5 techniques were applied to measured vibration signals taken throughout the endurance test. The  
6 results of this study showed that the LMS technique is able to detect the bearing failure earlier  
7 (Elasha et al. [35]). Sonawane experimentally investigated defects prediction in a wind turbine  
8 drive train. In this study diagnosis techniques focusing on ball bearing defects for non-linear  
9 and non-stationary fault signals were investigated using vibration monitoring and spectral  
10 analysis as the predictive maintenance tools. The results showed that sequential regression SER  
11 algorithm was successful in detecting the gearbox defect and also demonstrated which gear  
12 contained the damage [25]. Gray and Watson [15]; have proposed a new approach for  
13 calculation of damage accumulation using standard turbine performance parameters and  
14 physics of failure methodology. They concluded that the proposed approach can be used to  
15 calculate all critical failure modes in real time on the basis of standard measured performance  
16 parameters [15]. Mohanty and Kar studied fault detection of the multistage gearbox by  
17 applying discrete wavelet transformation to demodulate the current signal. The results showed  
18 that the input shaft frequency is a good indicator of defects at a different load condition [19].  
19 Amirat and others provided an assessment of a failure detection technique based on the  
20 homopolar component of the generator stator current and highlighted the use of the Ensemble  
21 Empirical Mode Decomposition, EEMD, as a tool for failure detection in wind turbine  
22 generators for stationary and non-stationary cases [2]. Elasha applied various vibration analysis  
23 techniques including statistical measures, spectral kurtosis and enveloping to diagnose the  
24 presence of naturally developed faults within a worm gearbox. The results showed that  
25 diagnosis of faults is feasible as long as the appropriate analysis technique is employed.  
26 Additionally, the results showed sensitivity to the direction of vibration measurement [10].

27  
28 Zhang and others applied data mining algorithms and statistical methods to analyse the jerk  
29 data obtained from monitoring the gearbox of a wind turbine and identify failed stages of the  
30 gearbox. They applied the correlation coefficient analysis and clustering analysis for the  
31 component failure identification [32]. Elforjani experimentally investigated condition  
32 monitoring of slow speed bearing and applied linear regression classifier and multilayer  
33 artificial neural network model. Elforjani used a new fault indicator which is signal intensity  
34 estimator (SIE) for analysing data and estimate remaining useful life (RUL) for bearing while  
35 in operation. The results demonstrated the applicability of proposed models in locating and  
36 discriminating the faulty bearings from the healthy bearings. Therefore the results showed the  
37 reliability and sensitivity of SIE to detecting of incipient cracks and defects [12]. Minh Zhao  
38 proposed Tachless envelope order method (TLEO) and used vibration signals collected from  
39 locomotive roller bearing to demonstrate the effectiveness of the proposed method. They  
40 illustrated the effectiveness of the proposed method by simulation and experimental work. The  
41 analysed results showed that the TLEO could identify different bearing faults effectively and  
42 accurately under speed varying conditions [33]. Yuh Tay Sheen proposed an envelope  
43 estimation algorithm based on the resonance modes of the mechanical system. The results  
44 showed that the envelope estimation algorithm could be applied for signal processing for  
45 bearing vibration. Furthermore, the results of the envelope spectra showed acceptable  
46 consistency of the proposed method to the high-frequency resonance technique [24]. Literature  
47 review shows there is a lack of real world application data and especially for detecting of  
48 bearing degradation within gearboxes where the bearing fault is masked with noise and  
49 components of gear meshing. Therefore this paper will employ a series of signal processing  
50 techniques to improve bearing fault detection. In addition it will employ a new condition

1 indicator, Energy Index (EI), to detect high speed shaft bearing failure in wind turbine gearbox.  
2 In this paper, a crack fault in the high-speed bearing has been investigated using vibration  
3 analysis. The analysis has been performed using newly developed energy index and outer race  
4 fault indicators, as well as conventional condition indicators such as rms and kurtosis. In  
5 addition, the demodulation analysis was performed to detect the crack and evaluate the  
6 progress.

7  
8 **2. Vibration Measurements**

9 The dataset used in the current study was extracted from the high-speed shaft of a two MW  
10 commercial wind turbine with measurements taken for fifty consecutive days by using the  
11 vibration-based method. The accelerometers were micro- electromechanical systems (MEMS)  
12 based. The component under examination was the high-speed bearing which is housed on the  
13 tail of the gearbox. The bearing defect was detected by a sensor which has been mounted  
14 radially on the bearing support ring. Fig. 2 shows the defect in the high-speed shaft bearing.  
15 Data was collected over the 50 days in 10-min intervals. The database consisted of 50  
16 waveforms, which were recorded at 1800 rpm. The data was sampled at 97656 sps for 6 s [6].  
17 Bearing envelope analysis was performed by a band passing the signal between 9 and 11  
18 KHz. The Fast Kurtogram Matlab code and other codes were used on the heterodyned signal.  
19 Statistical parameters such as kurtosis, crest factor, and energy index were calculated. Table 1  
20 below lists the operation details of the wind turbine which has been monitored until the high-  
21 speed shaft bearing failed.



22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32

**Figure 2:** Wind turbine high-speed shaft bearing defect [6]

1  
2**Table 1.** Wind turbine operating details

Nominal Machine Health:	Increasing inner race bearing fault		
Power rating:	2 MW		
Nominal speed:	1800 rpm		
<b>Bearing Information:</b>			
	FTF:	0.42 x (shaft speed)	
	BPFO:	6.72 x (shaft speed)	
	BPFI:	9.47 x (shaft speed)	
	BSF	1.435 x (shaft speed)	
<b>Measurement Channels</b>			
	Channel: 1	Sensor	
		Sample rate:	97656 Hz
		Record length:	6 Seconds
		Sensor type:	Accelerometer

3  
4

### 3. Result and Discussion


5 To correlate the impulsive presence on vibration signals with the component and its failure,  
6 many analyses were undertaken. This includes time domain, frequency domain and envelope  
7 analysis, see Fig. 3. The extracted signals from the faulty rolling elements can be processed  
8 using different indicators to obtain features of the measured vibration and to identify the health  
9 condition of the component. The statistical analysis techniques employed are commonly  
10 applied for time domain signal analysis, in which descriptive statistics such as rms, crest factor,  
11 kurtosis and energy index are used to detect the faults. To provide different ways for analysing  
12 measuring the signals deviations from the normal conditions, several of fault index extraction  
13 and signal processing techniques were applied to the measured data, include enveloping and  
14 spectrum analyses. Statistical tools such as Crest factor (CF), energy index (EI), and kurtosis  
15 (KU) have been employed for bearing defect detection.

16  
17  
18

#### 3.1 Time domain analysis


19 The extracted data, in general, have a tendency to be high noisy because of overlapping signals  
20 of the system components, such as the case of vibration data, and for that reason, it is required  
21 to be filtered before any future processing. However, an excess in reduction, may lead the  
22 extracted data to losing some important information. Fig. 4, shows the waveform of the data  
23 on day 1, 10, 20, 30, 40, and 50 respectively. Visual examination of the waveforms showed no  
24 distinctive difference between the signals acquired on different days, therefore this kind of  
25 analysis is not useful for fault detection. Full records of all days have been examined. First, it  
26 can be seen that the collected vibration signals are dominated by other vibration components,  
27 which is mainly induced by the gearbox components (such as shafts and gears). The results  
28 showed that as the running of the wind turbine progressed with time, waveform showed a  
29 noisier trend in the variation in bearing signals occurred, see Fig. 4.

30

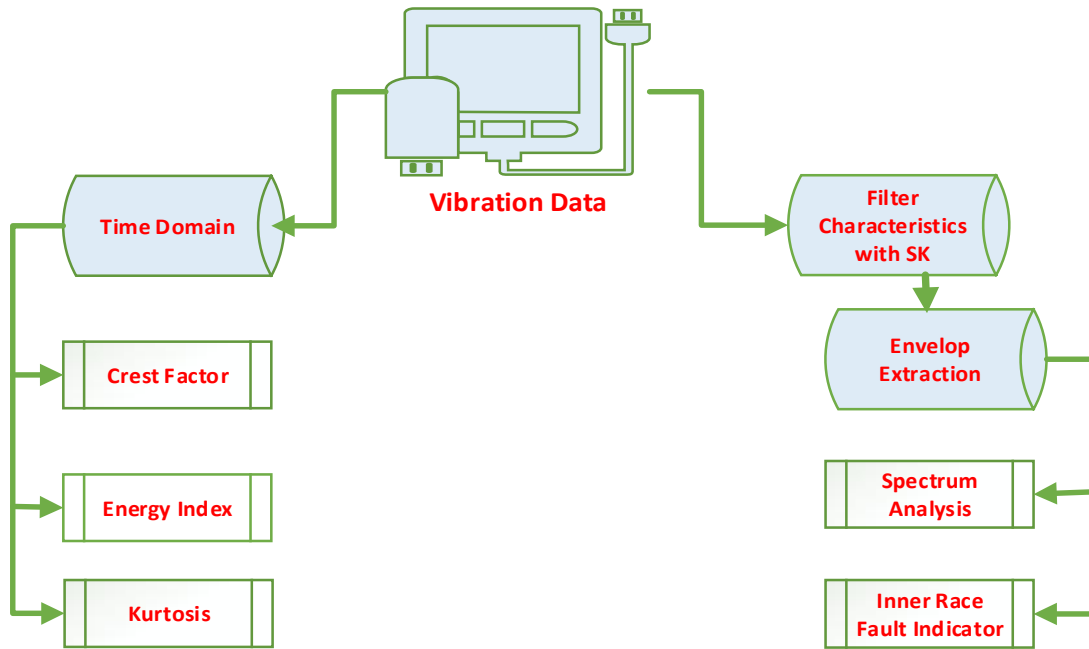

1  
2  
3  
4

Figure 3: Proposed signal processing scheme

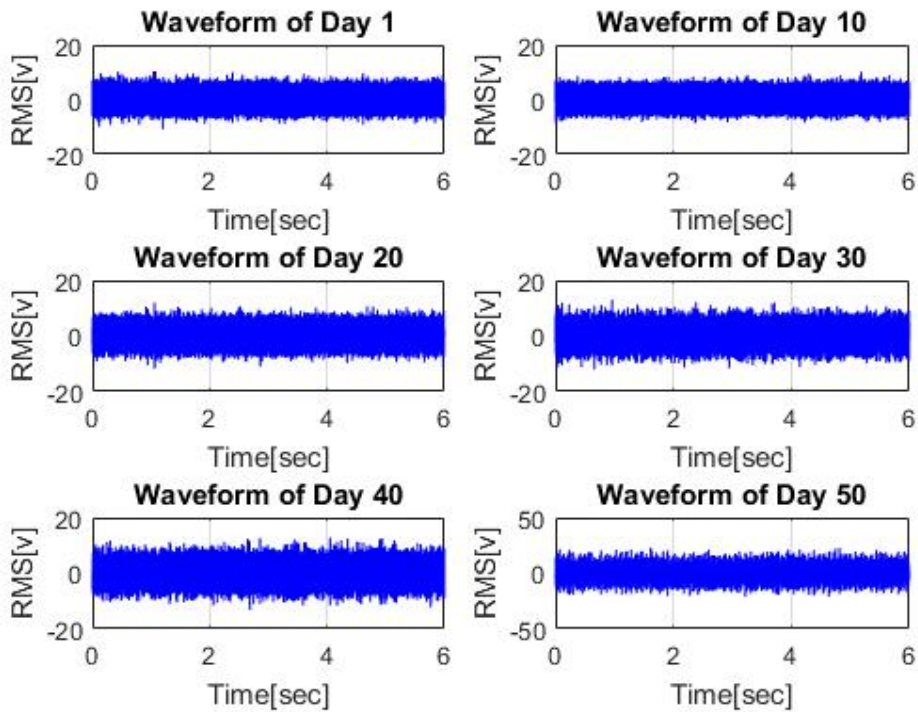

5  
6  
7  
8

Figure 4: Vibration Data Collected at different days of Monitoring

## 3.2 Condition Fault Indicators

Condition monitoring systems based on vibration analysis can monitor all parts of gearboxes, for example, gears, bearings and shafts. For a better signal to noise ratio, a raw vibration signal is filtered and pre-amplified. Consequently, the signal is processed in two different ways and the overall vibration level is monitored. The time domain signal is synchronously averaged and consequently filtered to focus only on the important part of the vibration signal. Then some condition indicators are computed. Finally, the computed condition fault indicators are compared to provide useful information about the bearing condition.

### 3.2.1 Kurtosis

One of the most effective means to detect bearings failure from vibrational data is to monitor the value of the kurtosis of the acquired signal. The kurtosis is defined as the fourth statistical moment of a given signal and describes how peaky or flat the distribution is. It is known that KU is a measure of the peakness of a signal and on the basis that a signal will contain impulsive transient events during the onset of degradation [34]. A kurtosis value close to 3 indicates a Gaussian signal. Kurtosis greater than 3 indicates a sharp peak signal. Whereas, signals with relatively flat peaks have a kurtosis less than 3. In some applications, other sources of vibration signals or background noise frequently mask the bearing fault features in the signal and as a result of that, the kurtosis may not be able to capture the peaks of the faulty signal. In such cases, the kurtosis as an indicator is not useful; however, better results could be obtained if the kurtosis value was calculated across different frequency bands [8]. The kurtogram, developed by Antoni and Randall [4], is a representation of the kurtosis value as a function of the frequency and the bandwidth of the different frequency bands where it is calculated. Using the kurtogram, it is possible to identify the frequency band where the kurtosis is maximum. This information can be used to design a filter which extracts the part of the signal with the highest level of impulsiveness, enhancing the bearing fault signal from the raw signal. This technique has been already applied successfully by different researchers in bearing fault detection and diagnosis [5]. Kurtosis values for a given signal can be estimated using the equation:

$$K = \frac{1}{N} \sum_{i=1}^N \left( \frac{x - \mu}{\sigma} \right)^4 \quad (1)$$

### 3.2.2 Crest Factor

One of the frequently used parameter to characterised obtained data is Crest factor. Crest factor is defined as a ratio of the signal side peak value of the input signal to the root mean square level [28]. Crest factor calculated using the equation:

$$C = \frac{s_p}{s_r} \quad (2)$$



### 3.2.3 Energy Index


Energy Index (EI) is defined as the square of the ratio of the root mean square of a defined segment (RMS<sub>segment</sub>) in a given signal to the overall root mean square (RMS<sub>overall</sub>) of the same signal. The technique was effectively applied to simulate an experimental data of bearing [1]. In application, an Energy Index value of one is associated with non-transient type waveforms and greater than one where transient characteristics are present. EI was calculated using the equation:

$$E = \left( \frac{R_i}{R} \right)^2 \quad (3)$$

To understand the trend of the degradation signals, originating from bearings, linear or exponential models were widely employed to fit the features extracted for the acquired signals. In this research work, the following exponential model could fit the different fault indicators.

$$f = y_0 + \frac{a(e^b - 1)}{b} \quad (4)$$

In the above function (f) is the value of any of the fault indicators (KU or EI and/or CF), (a and b) are the model constants, and (t) is the time. The constant (y<sub>0</sub>) is used here to indicate the value when the degradation time is almost equal to zero. To find the optimal values for the above function constants a, b and y<sub>0</sub>, the popular least-square method was applied to the bearing case; Fig. 5 shows the fitted bearing case for 50 days of measurements. Table 2 also summarizes the general optimal estimated constants and global goodness of fit (R<sup>2</sup>) for the exponential model. While the operating days passed 25 days of measurement, results indicated that the three indicators EI, CF and KU have relatively high values of about 122.95, 5.41 and 3.37 respectively. It is worth mentioning that after 40 days of operating significant increase in calculated KU and EI values was observed. As the operating days progressed the KU and EI values were very sensitive to the variation in bearing signals, see Fig. 5. On the termination of measurements (50 days running) EI recorded a maximum value of 268.68, whereas KU recorded maximum values of 5.6, shown in Fig. 5. However, the CF result showed an inconsistent pattern and therefore CF is not fitting with the degradation pattern shown in Fig. 5. It can be concluded that KU and IE are reliable indicators in detecting bearing failure, their detection sensitivity depends on the presence of incipient defects and on defect size. The observations from the results presented in Fig. 4, show also that the EI is a sensitive tool to a high transient vibration activity in rotary machines, typical for natural degrading bearings. Hence the continuous monitoring of bearings employing techniques such as the EI would offer the operator a relatively sensitive method for observing high transient type activity.

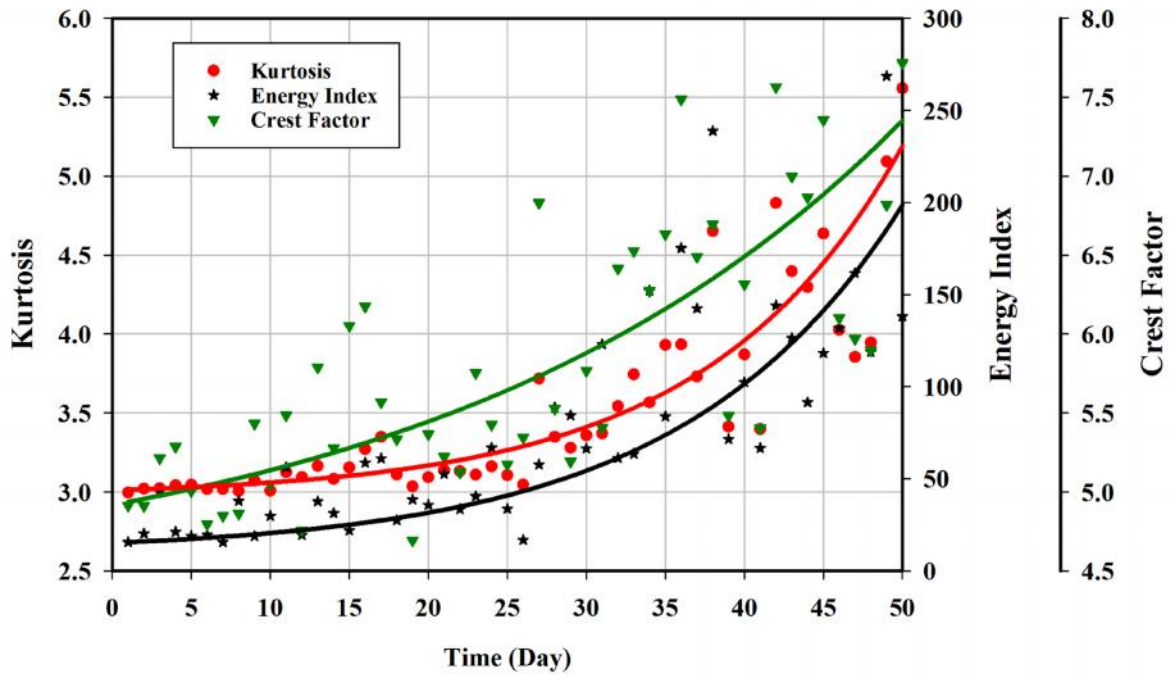

**Figure 5:** Condition indicators


**Table 2.** general optimal estimated constants

$f$	$y_0$	$a$	$b$	$R^2$
<b>Kurtosis</b>	3.0116	0.0031	0.0811	0.9336
<b>Energy Index</b>	15.2174	0.364	0.0725	0.9996
<b>Crest Factor</b>	4.9187	0.0183	0.0342	0.8697

### 3.3 Demodulation analysis

The time series data has further been processed using Fast Fourier Transform FFT to obtain frequency spectrum. Fig. 6 depicted the power spectrum of the vibration signal collected on the day 15. Observations from this figure show multiple peaks at 3500 Hz and 10 KHz. However, no fault frequencies can be identified due to high noise level and existence of strong signal from gears and shafts. Thus, the vibration signal was further studied to reduce the noise level and extract bearings fault frequency. To achieve this task, the authors employed the envelop analysis. In envelope analysis, the vibration signal is filtered at high frequency band to extract bearing impacts. The frequency band characteristic has been obtained using spectral kurtosis (SK). The filtered signal then processed using frequency analysis. Fig. 7 presents kurtogram obtained using the original algorithm developed by Antonio and others [4], the result shows the frequency band and central frequency of the filter for the vibration data collected on day 20 and day 50. Then this band has been used to filter out the vibration signal. To obtain the frequency spectrum, the filtered signal has further been processed; samples of the selected signals are presented in figures [8-13]. Observations from Fig. 8, for instance, show an inner race fault frequency at 284 Hz. It is worth mentioning that though the noise level was very high, the speed shaft frequency and its harmonics can obviously be observed. Analysis of

1 the acquired signals throughout the days 10 and 20 show almost the same re-  
 2 and 10.

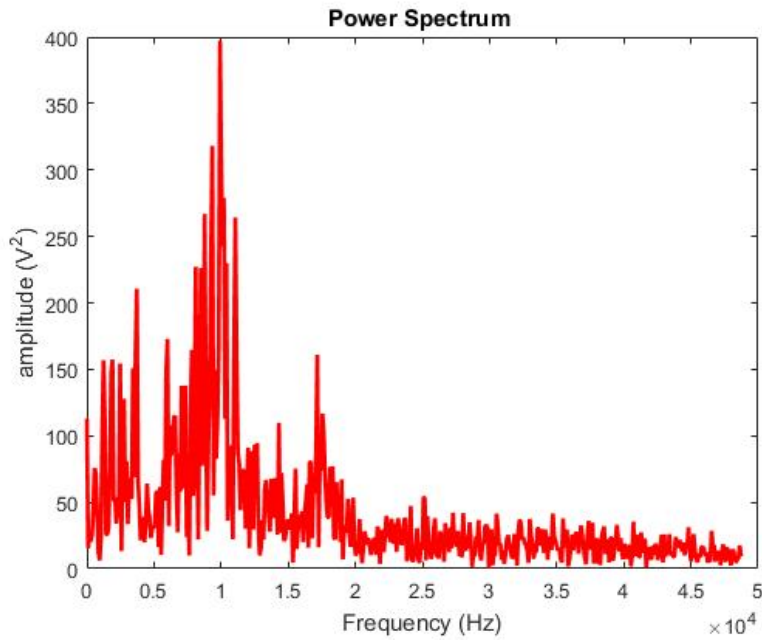


3


4 **Figure 6:** Power Spectrum for the fifteenth day  
 5

6 Interestingly, significant increase in the amplitude of the bearing inner race fault frequency was  
 7 noted in the enveloped signal for day 30. The amplitude increased from 0.017 in day 20 to 0.11  
 8 in the day 30, shown in Fig. 11. For the data collected on day 40, similar remark was observed,  
 9 and harmonic of the bearing fault was also detected Fig. 12. On the termination of  
 10 measurements (day 50) the harmonics of the faulty bearing recorded higher level than the noted  
 11 on day 30, see Fig. 13.

12 Another analysis was undertaken using the fault frequency indicator. Results of the inner race  
 13 fault indicator, presented in Fig. 14, showed an increase in the fault frequency amplitude after  
 14 14 days of measurements. The highest amplitude of this indicator was recorded between day  
 15 28 and day 41, and it eventually decreased to its level prior to day 14. This was attributed to  
 16 the high noise level as a result of the formation of fully developed crack on the bearing race.  
 17 The use of this indicator could also provide another way to measure how the bearing deviates  
 18 from its normal health conditions.

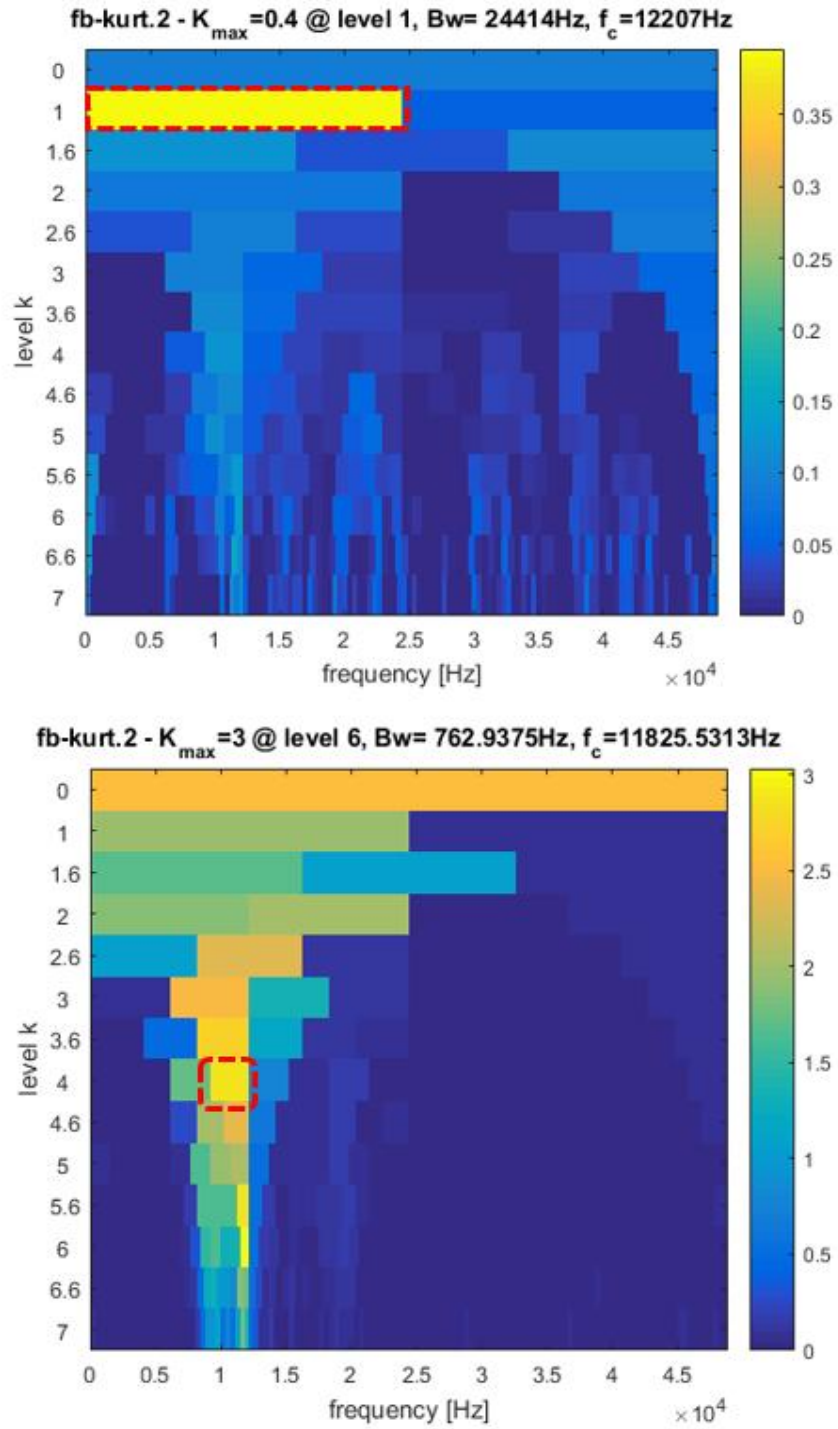


1  
2 **Figure 7:** Kurtogram plot obtained from vibration data collected on day 20 (up) and day 50 (down)  
3

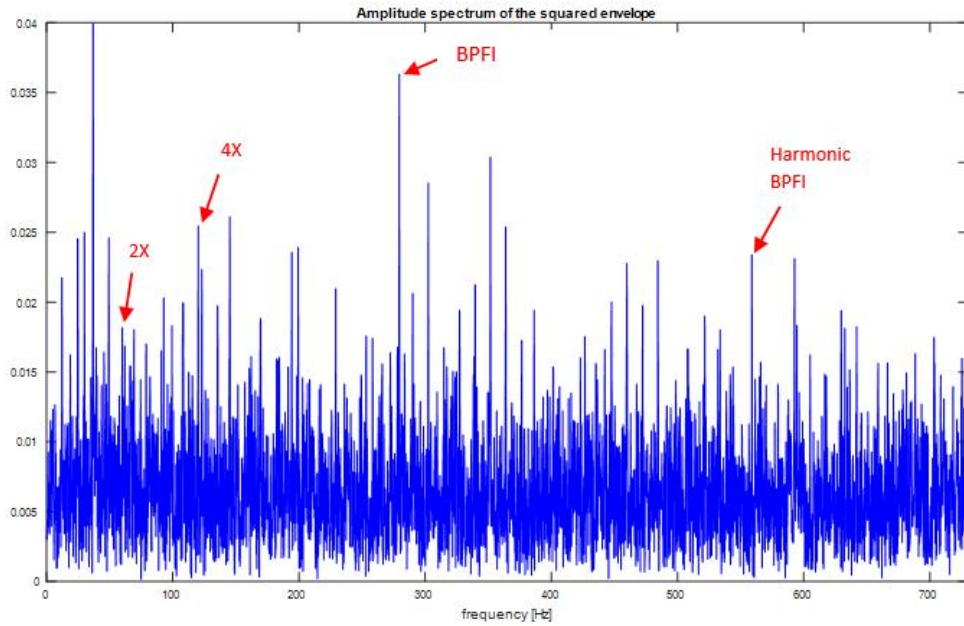


1  
2

**Figure 8:** Amplitude spectrum of the squared envelope first day

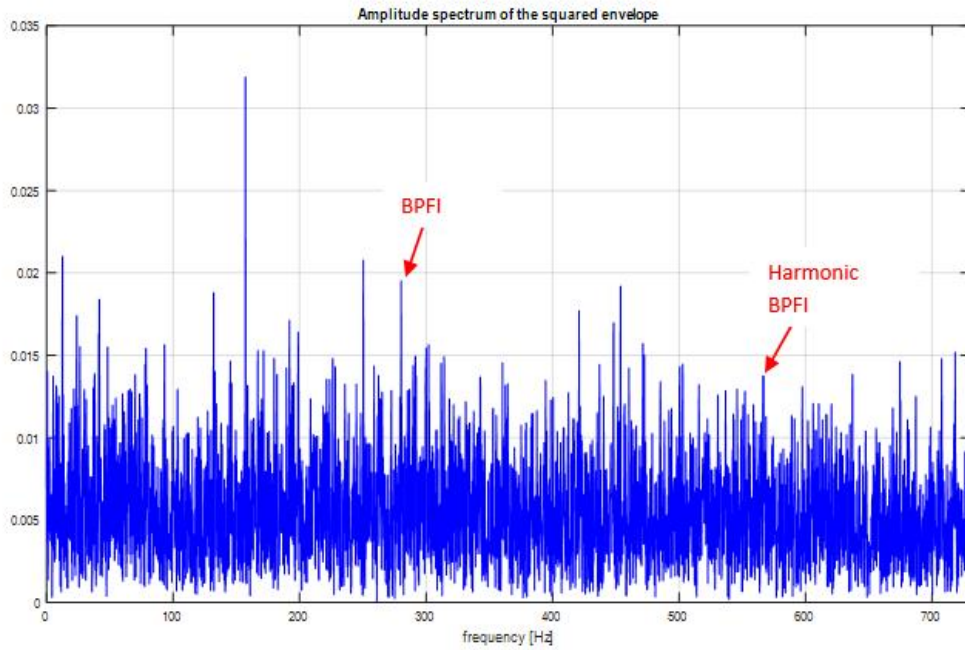


3  
4

**Figure 9:** Amplitude spectrum of the squared envelope day 10

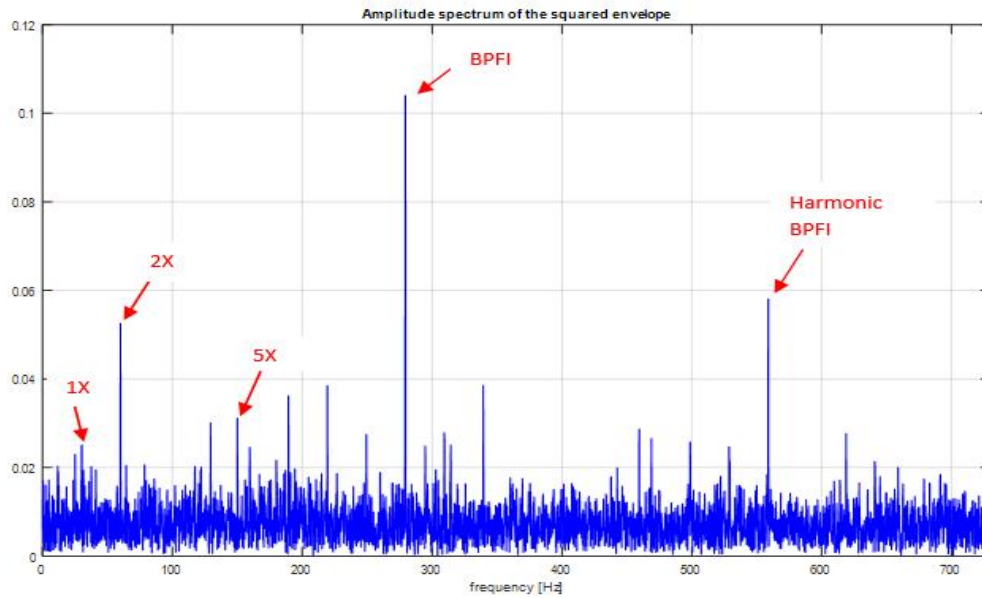


1  
2

Figure 10: Amplitude spectrum of the squared envelope day 20

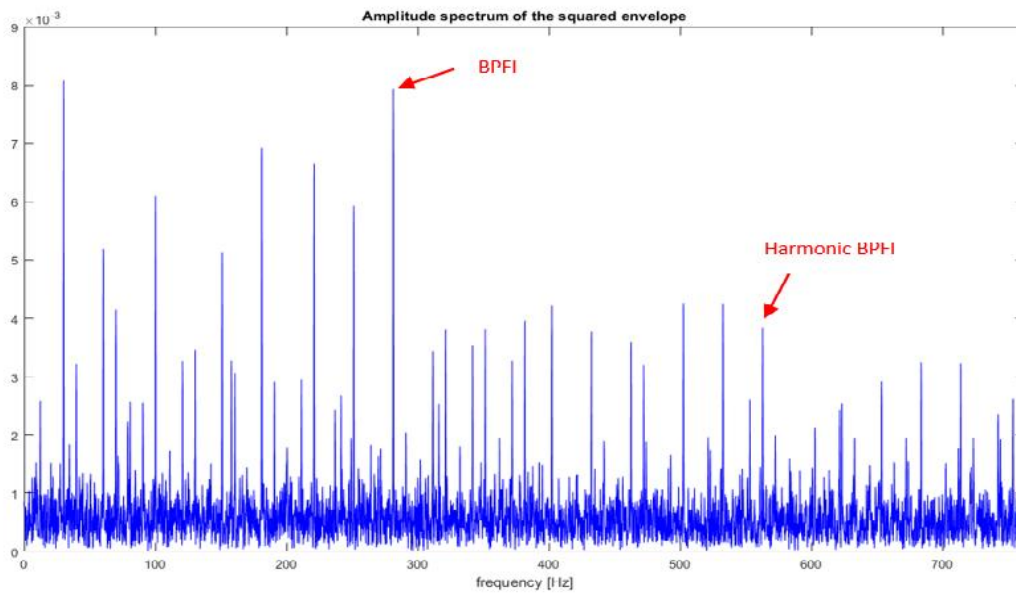


3  
4

Figure 11: Amplitude spectrum of the squared envelope day 30

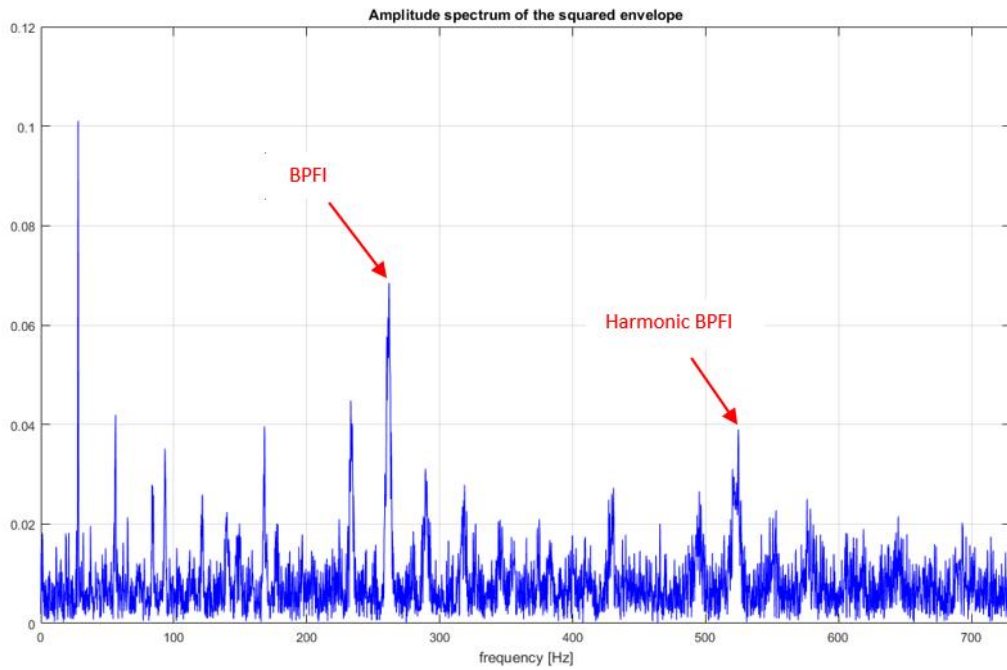

1  
2  
3

Figure 12: Amplitude spectrum of the squared envelope day 40

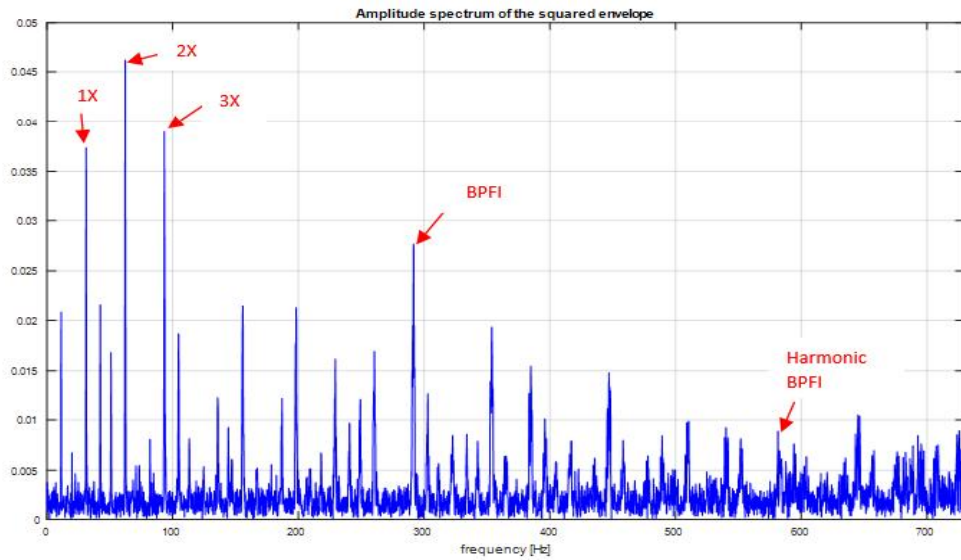

4  
5  
6

Figure 13: Amplitude spectrum of the squared envelope day 50

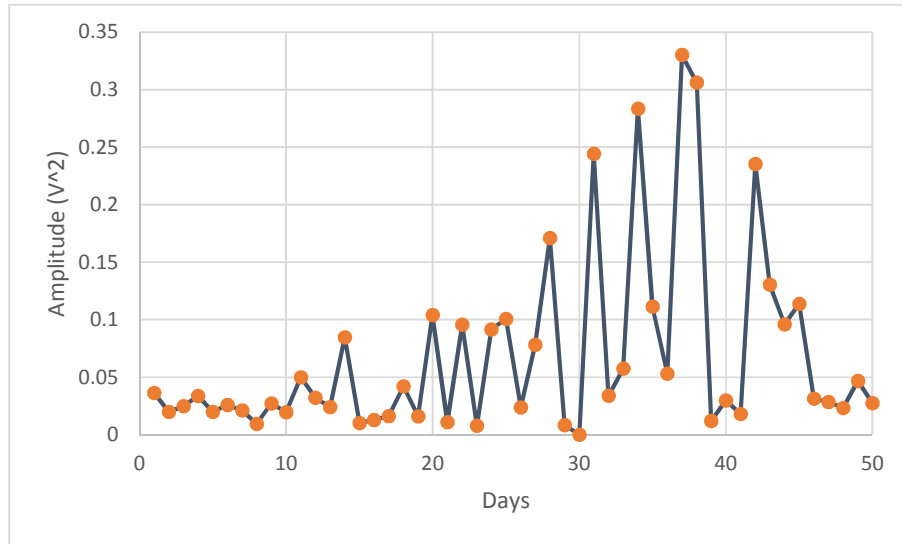


Figure 14: Outer race fault indicator

1  
2  
3  
4  
5

#### 4. Discussion and Conclusion

6 The techniques used in this paper are typically used for applications where strong background  
7 noise masks the defect signature of interest within the measured vibration signature. this paper  
8 motivated by a lack of real world application data and especially for detecting of bearing  
9 degradation within gearboxes where the bearing fault is masked with noise and components of  
10 gear meshing. Therefore this paper has employed a series of signal processing techniques to  
11 improve bearing fault detection. In addition it has employed a new condition indicator, Energy  
12 Index (EI), to detect high speed shaft bearing failure in wind turbine gearbox. The use of Energy  
13 Index is relatively recent and this paper enhances the understanding of this technique as means  
14 of obtaining condition information in these intricate conditions.

15

16 Results from statistical indicators showed both kurtosis and EI are reliable indicators and  
17 increased as fault severity increases. In addition these indicators provide a clear exponential  
18 trend, which is very useful to fault prognosis. However, the CF showed poor results with no  
19 clear trend, therefore such indicator was not useful in this case. Frequency analysis using Fast  
20 Fourier Transform should no fault frequency exist. However, Results from frequency analysis  
21 using Spectral Kurtosis and envelope analysis showed the possibility to identify the fault defect  
22 frequency at early stage. The fault frequency was identified from the first day of the test and  
23 the fault frequency amplitude increases as crack progress.

24

25 By comparing the results of statistical condition indicators with frequency analysis; it is clear  
26 that the frequency analysis can be considered as a superior tool in detection of the bearing fault  
27 at early stages though the statistical indicators were sensitive as the fault on the bearing race  
28 was well advanced. Further, the use of the spectral kurtosis could exactly identify the location  
29 of the fault within the bearing components. The fault severity was assessed using inner race  
30 fault indicator, and the results showed a significant increase in the amplitude as the crack  
31 progressed with time. However, this was not the case throughout the measurement period in  
32 the last days where a sharp drop in the indicator levels was noted. This is due to an increase of  
33 the clearance within the bearing which led to less vibration levels.



1 Results obtained from the analysis of condition indicators showed that the energy index as a  
2 consistent fault measure of the fault severity, and it had less drops as the fault progressed. On  
3 contrary crest factor, kurtosis and inner race bearing fault showed some level variation with  
4 progress of the crack. Thus, energy index can be used to provide a good severity measure of  
5 the bearing fault. Overall, the signal processing techniques used in this study proved their  
6 ability in detection of crack fault within wind turbine gearbox. In addition, combination use of  
7 these techniques will in turn provide the analyst with more reliable diagnosis tools for online  
8 monitoring of wind turbines.

9  
10  
11 **Declaration of conflicting interests**

12  
13 The author(s) declared no potential conflicts of interest with respect to the research, authorship,  
14 and/or publication of this article.

15  
16 **Funding**

17  
18 The author(s) received no financial support for the research, authorship, and/or publication of  
19 this article.

20  
21 **5. References**

- 22 1. K.R. Al-Balushi, et al., Energy index technique for detection of acoustic emissions  
23 associated with incipient bearing failures, *Appl. Acoust.* 71 (9) (2010) 812e821,  
24 Available at: <https://doi.org/10.1016/j.apacoust.2010.04.006>.  
25 2. Y. Amirat, V. Choqueuse, M. Benbouzid, EEMD-based wind turbine bearing failure  
26 detection using the generator stator current homopolar component, *Mech. Syst. Signal*  
27 *Process.* 41 (1-2) (2013) 667-678, Available at: [https://doi.org/10.1016/](https://doi.org/10.1016/j.ymsp.2013.06.012)  
28 [j.ymsp.2013.06.012](https://doi.org/10.1016/j.ymsp.2013.06.012).  
29 3. Anon, Research on Online Monitoring and Diagnosis of Bearing Fault of Wind Turbine  
30 Gearbox Based on Undecimated Wavelet Transformation Zhou Fucheng North China  
31 Electric Power University Science, Technology College, 2010, pp. 6-9.  
32 4. J. Antoni, Fast computation of the kurtogram for the detection of transient faults, *Mech.*  
33 *Syst. Signal Process.* 21 (1) (2007) 108-124.  
34 5. T. Barszcz, R.B. Randall, Application of spectral kurtosis for detection of a tooth crack  
35 in the planetary gear of a wind turbine, *Mech. Syst. Signal Process.* 23 (4) (2009), pp.  
36 1352-1365.  
37 6. E. Bechhoefer, B. Van Hecke, D. He, Processing for improved spectral analysis, in:  
38 Annual Conference of the Prognostics and Health Management Society, 2013, pp. 1-6.  
39 7. J. Cibulka, et al., A review on approaches for condition based maintenance in  
40 applications with induction machines located offshore, *Model. Identif. Control* 33 (2)  
41 (2012), pp. 69-86.  
42 8. B. Eftekharnjad, et al., The application of spectral kurtosis on Acoustic Emission and  
43 vibrations from a defective bearing, *Mech. Syst. Signal Process.* 25 (1) (2011), pp. 266-  
44 284.  
45 9. F. Elasha, D. Mba, C. Ruiz-Carcel, A comparative study of adaptive filters in detecting  
46 a naturally degraded bearing within a gearbox, *Case Stud. Mech. Syst. Signal Process.*  
47 3 (October) (2016a) 1-8.

- 1 10. F. Elasha, D. Mba, C. Ruiz-Carcel, Pitting detection in worm gearboxes with vibration  
2 analysis, *Mech. Mach. Sci.* 23 (2015) 231-241, Available at: [https://doi.org/](https://doi.org/10.1016/j.engfailanal.2014.04.028)  
3 10.1016/j.engfailanal.2014.04.028.
- 4 11. F. Elasha, D. Mba, C. Ruiz-Carcel, A comparative study of adaptive filters in detecting  
5 a naturally degraded bearing within a gearbox, *Case Stud. Mech. Syst. Signal Process.*  
6 3 (2016b) 1-8, <https://doi.org/10.1016/j.csmssp.2015.11.001>.
- 7 12. M. Elforjani, Estimation of remaining useful life of slow speed bearings using acoustic  
8 emission signals, *J. Nondestruct. Eval.* 35 (4) (2016) pp. 1-16.
- 9 13. A. Hamilton, F. Quail, Detailed state of the art review for the different on-line/ in-line  
10 oil analysis techniques in context of wind turbine gearboxes, *ASME Turbo Expo.* 133  
11 (July) (2011) pp. 1-18.
- 12 14. J. Igba, K. Alemzadeh, C. Durugbo, E.T. Eiriksson, Analysing RMS and peak values  
13 of vibration signals for condition monitoring of wind turbine gear-boxes, *Renew.*  
14 *Energy* 91 (2016), pp. 90-106, <https://doi.org/10.1016/j.renene.2016.01.006>.
- 15 15. C.S. Gray, S.J. Watson, Physics of failure approach to wind turbine condition based  
16 maintenance, *Wind Energy* 13 (August 2009) (2010), pp. 395-405.
- 17 16. A. Kusiak, W. Li, The prediction and diagnosis of wind turbine faults, *Renew. Energy*  
18 36 (1) (2011), pp. 16-23.
- 19 17. B. Lu, et al., A review of recent advances in wind turbine condition monitoring and  
20 fault diagnosis, *Electron. Mach. Wind* (2009) 1-7. Available at: [http://](http://ieeexplore.ieee.org/xpls/abs_all.jsp?arnumber=5208325)  
21 [ieeexplore.ieee.org/xpls/abs\\_all.jsp?arnumber=5208325](http://ieeexplore.ieee.org/xpls/abs_all.jsp?arnumber=5208325).
- 22 18. Y. Lu, J. Tang, H. Luo, Wind turbine gearbox fault detection using multiple sensors  
23 with features level data fusion, *J. Eng. Gas Turbines Power* 134 (4) (2012), pp. 042501.
- 24 19. A.R. Mohanty, C. Kar, Fault detection in a multistage gearbox by demodulation of  
25 motor current waveform, *IEEE Trans. Indus. Electron.* 53 (4) (2006), pp. 1285-1297.
- 26 20. W. Musial, S. Butterfield, B. McNiff, Improving wind turbine gearbox reliability, in:  
27 *European Wind Energy Conference, 2007*, pp. 1-13.
- 28 21. M. Nie, L. Wang, Review of condition monitoring and fault diagnosis technologies for  
29 wind turbine gearbox, *Procedia CIRP* 11 (Cm) (2013) 287e290, Available at:  
30 <https://doi.org/10.1016/j.procir.2013.07.018>.
- 31 22. M.S. Patil, J. Mathew, P.K. RajendraKumar, Bearing signature analysis as a medium  
32 for fault detection, *J. Tribol.* 130 (1) (2008), 014001e1.
- 33 23. C. Ruiz-Carcel, V.H. Jaramillo, D. Mba, J.R. Ottewill, Y. Cao, Combination of  
34 process and vibration data for improved condition monitoring of industrial systems  
35 working under variable operating conditions, *Mech. Syst. Signal Process.* 66-67 (2016),  
36 pp. 699-714, <https://doi.org/10.1016/j.ymsp.2015.05.018>.
- 37 24. Y.T. Sheen, An envelope analysis based on the resonance modes of the mechanical  
38 system for the bearing defect diagnosis, *Meas. J. Int. Meas. Confed.* 43 (7) (2010) 912-  
39 934, Available at: <https://doi.org/10.1016/j.measurement.2010.03.011>.
- 40 25. P.B. Sonawane, Fault diagnosis of windmill by FFT analyzer, *Int. J. Innov. Eng.*  
41 *Technol.* 4 (4) (2014), pp. 47-54.
- 42 26. M. Str, T. Barszcz, Application of artificial neural network for damage detection in  
43 planetary gearbox of wind turbine, *Shock Vib.* 2016 (2016), pp. 1-13.
- 44 27. R. Uma Maheswari, R. Umamaheswari, Trends in non-stationary signal processing  
45 techniques applied to vibration analysis of wind turbine drive train a contemporary  
46 survey, *Mech. Syst. Signal Process.* 85 (2017) 296-311, Available at: [https://](https://doi.org/10.1016/j.ymsp.2016.07.046)  
47 [doi.org/10.1016/j.ymsp.2016.07.046](https://doi.org/10.1016/j.ymsp.2016.07.046).
- 48 28. P. Večer, M. Kreidl, R. Šmíd, Condition indicators for gearbox condition monitoring  
49 systems, *Acta Polytech.* 45 (6) (2005), pp. 35-43.

- 1 29. Y. Wenxian, et al., Cost-effective condition monitoring for wind turbines, *IEEE Trans.*  
2 *Indus. Electron.* 57 (1) (2010) 263-271.
- 3 30. Wenxian Yang, Peter J. Tavner, Christopher J. Crabtree, Y. Feng, Y. Qiu, Wind turbine  
4 condition monitoring: technical and commercial challenges, *Wind Energy* 17 (April  
5 2013) (2014) 657e669. Available at: <http://onlinelibrary.wiley.com/doi/10.1002/we.1608/full>.
- 6 31. S. Yang, W. Li, C. Wang, The intelligent fault diagnosis of wind turbine gearbox based  
7 on artificial neural network, in: 2008 International Conference on Condition Monitoring  
8 and Diagnosis, 2008, pp. 1327-1330. Available at:  
9 <http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=4580221>.
- 10 32. Z. Zhang, et al., Fault analysis and condition monitoring of the wind turbine gearbox,  
11 *IEEE Trans. Energy Convers.* 27 (2) (2012), pp. 526-535.
- 12 33. M. Zhao, et al., Multi-Fault detection of rolling element bearings under harsh working  
13 condition using imf-based adaptive envelope order analysis, *Sens. Switz.* 14 (11)  
14 (2014), pp. 20320-20346.
- 15 34. J. Zhu, et al., Survey of condition indicators for condition monitoring systems, in:  
16 Annual Conference of the Prognostics and Health Management Society, vol. 5, 2014,  
17 pp. 1-13.
- 18 35. F. Elasha, D. Mba, C. Ruiz-Carcel, A comparative study of adaptive filters in detecting  
19 a naturally degraded bearing within a gearbox, *Case Studies Mech. Syst. Signal*  
20 *Process.* 3 (2016) 1-8, <https://doi.org/10.1016/j.csmssp.2015.11.001>.
- 21  
22